



CEILING FAN INSTRUCTION MANUAL


1, Tools ready

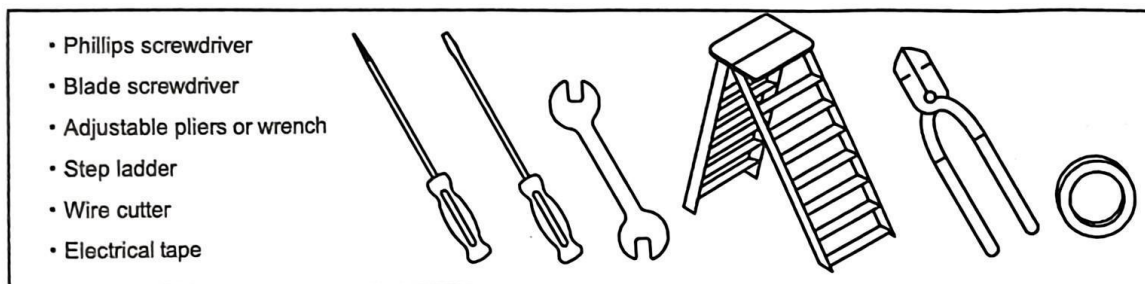

2, Parts inspection

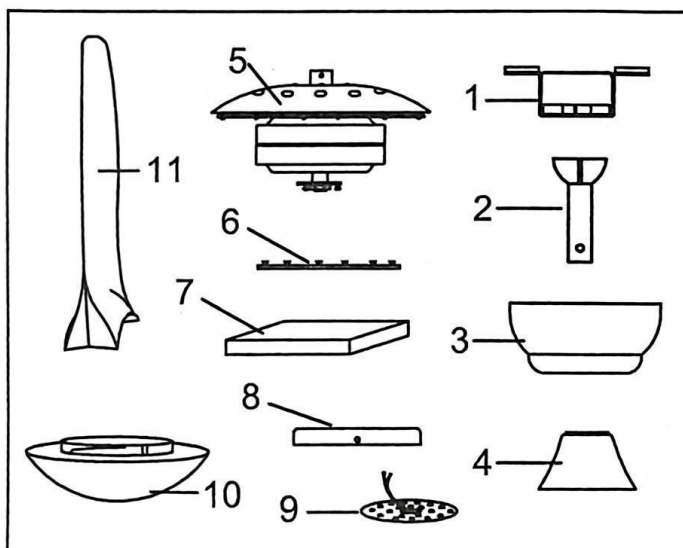


Screw package

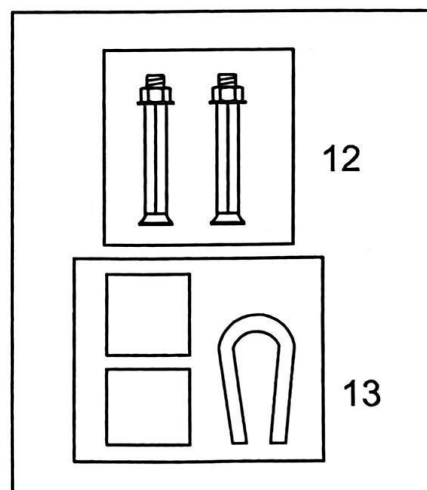


NO.	Name	Quantity	NO.	Name	Quantity
1	Hanger bracket	1	8	Lamp panel	1
2	Downrod	1	9	Led light	1
3	Hanging cup	1	10	Lamp cover	1
4	Decorative cover	1	11	Blades	3
5	Motor body	1	12	Expansion screws	2
6	Iron wire	1	13	Balance package	1
7	Remote control	1			

3, Install the hanger

1) Wooden ceiling wood with wood screwdriver in the wood or "Aberdeen" will be fixed on the lifting tight.

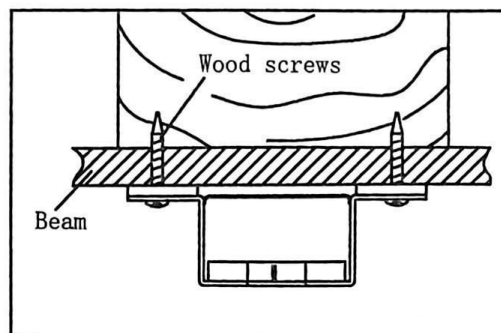


2) In the concrete ceiling, first with the $\Phi 8\text{mm}$ impact drill bit drill by the length of the expansion screw, and then use expansion screws with the hanger bracket fixed to the ceiling.

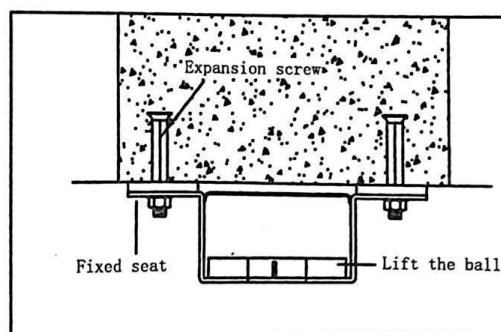


4, Install the blades

1) Remove the upper cover.

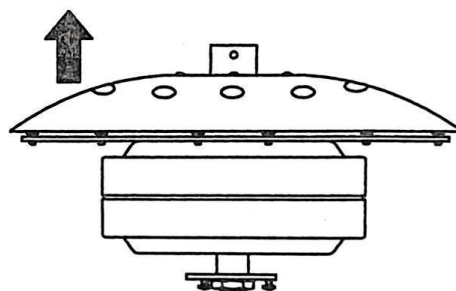


2) Connect the blades to the motor, and tighten the two screws of the iron wire.

3) Repeat this step to complete the installation of the other two blades, adjust the gap before locking.

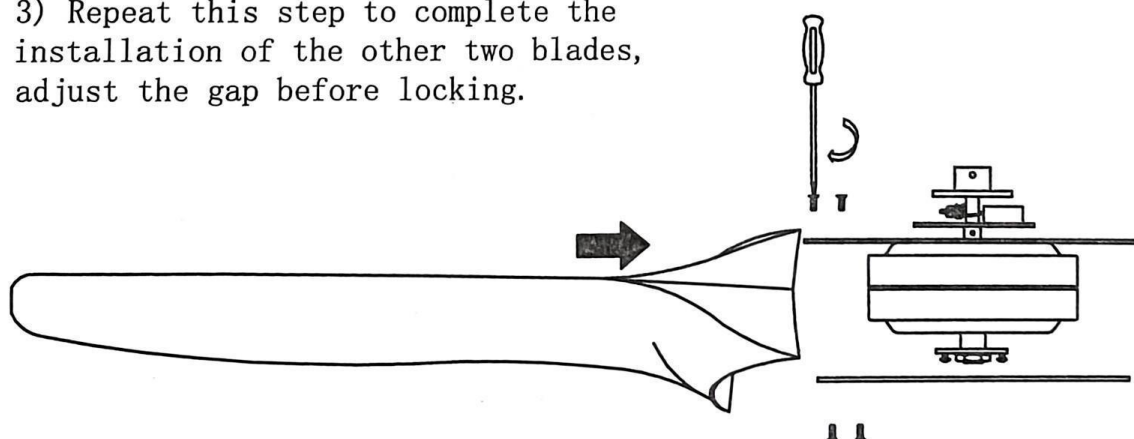


5, Install the cover

- 1) Insert the top cover through the motor lead and connector.

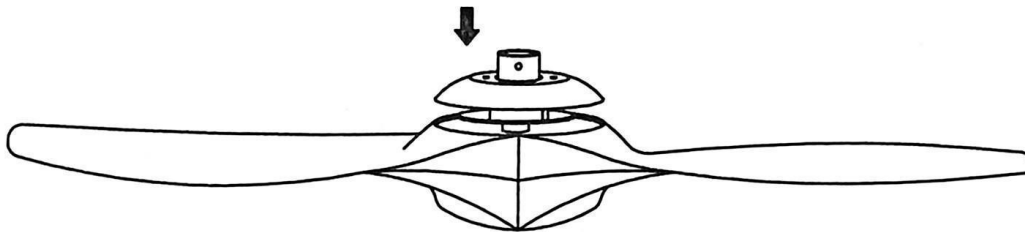


- 1) Fasten the six screws to secure the top cover to the connector.

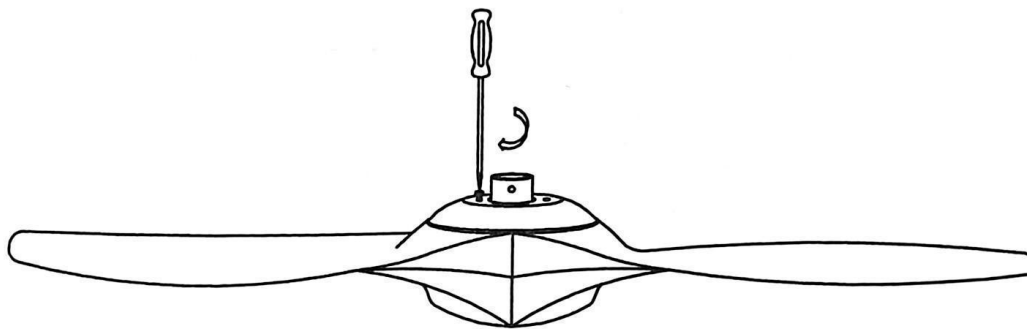


6, Install the lamps


- 1) Fasten the three screws of the lamp panel into the lamp connection board;

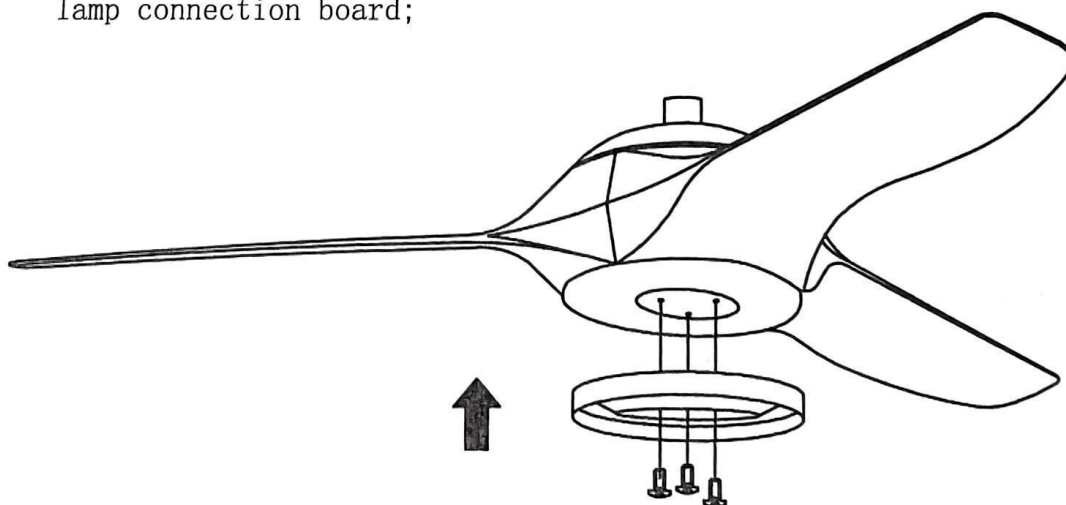


2) Connected to the LED light board and LED drive power cord.

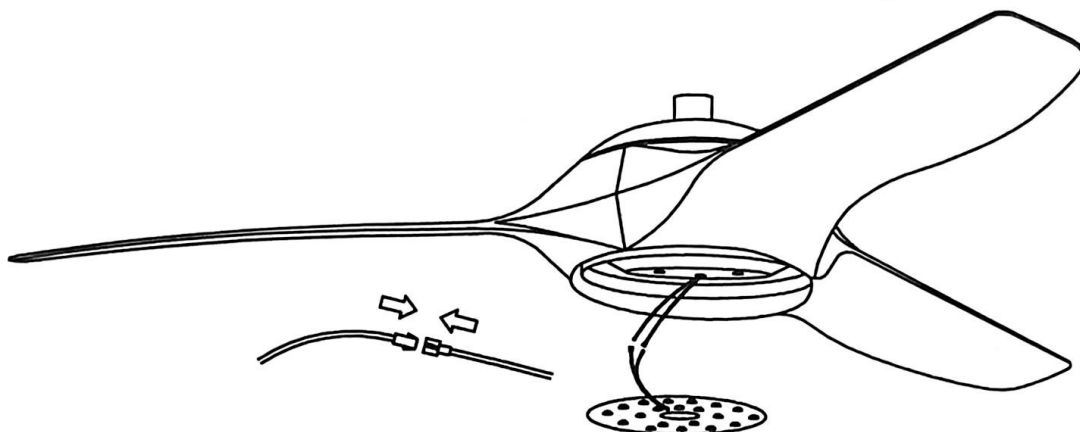

3) LED light magnetic on the lamp panel.

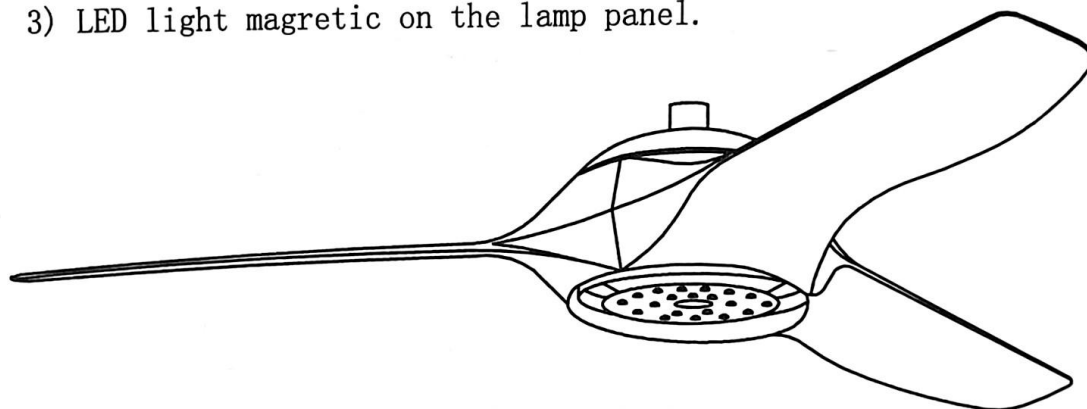


4) Turn the glass lampshade into the lamp panel and install the lamp.

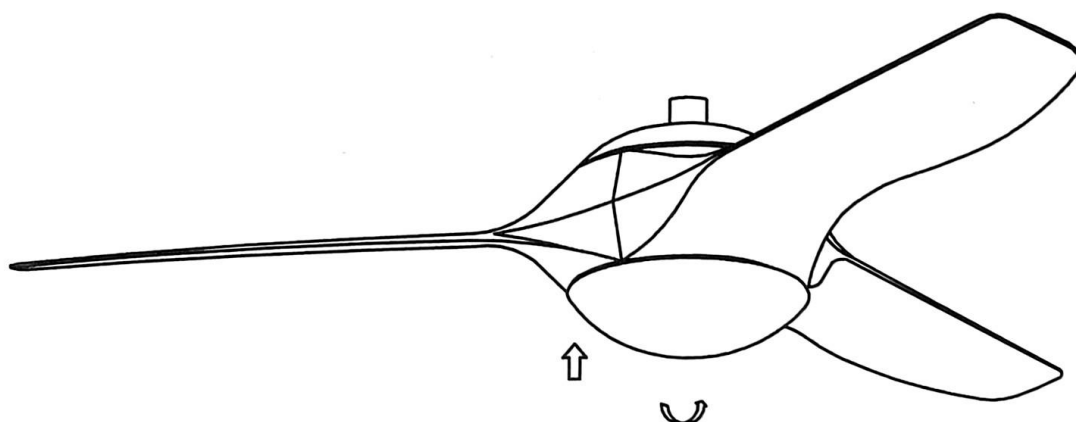


7, Installation of hanging pipes, hanging cups and decorative cover

Selection of hanging pipe

- 1) According to the ceiling height selection of the appropriate length of the pipe;
- 2) The ceiling fan is equipped with hanging pipe length of 5 inches\10 inches, if not, please consult the Company to purchase other size pipe;

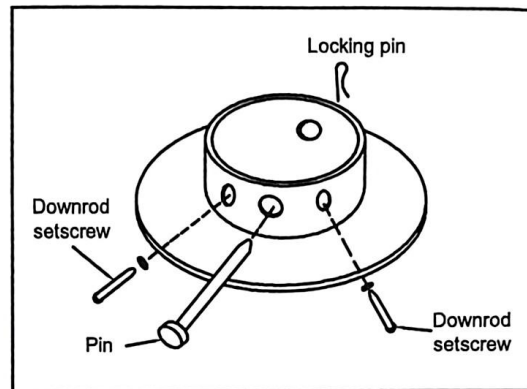


- 3) First remove the safety pin on the connection head, and then remove the two fixed hanging pipe screws of the connection balt;

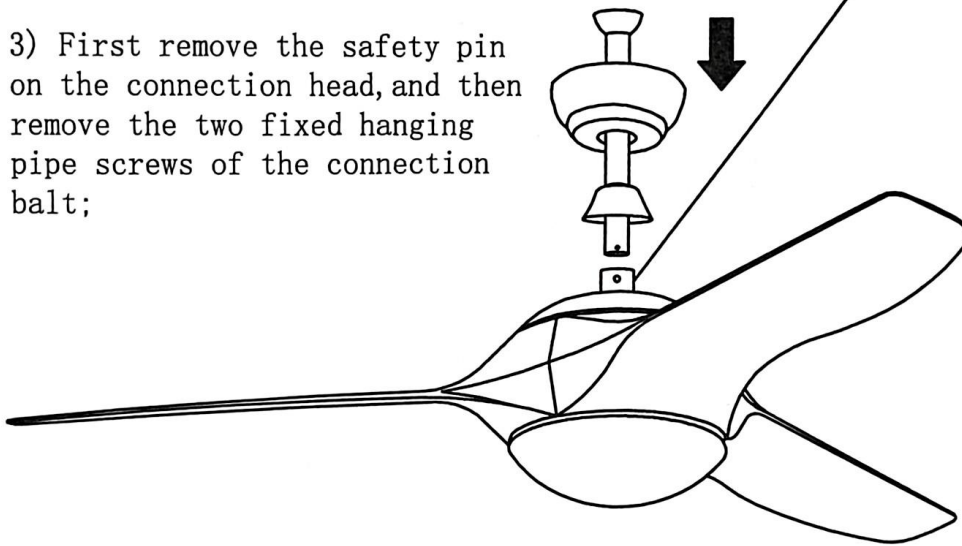

- 4) Will choose the appropriate hanging pipe in the right direction through the hanging cup and decorative cover and then put the power cord into the hanging pipe;
- 5) Insert the hanging pipe into the connector, insert the connecting bolt and install the safety pin, then lock the fixed hanging pipe screw firmly and cover the connecting head with the decorative cover.

8, Installation height

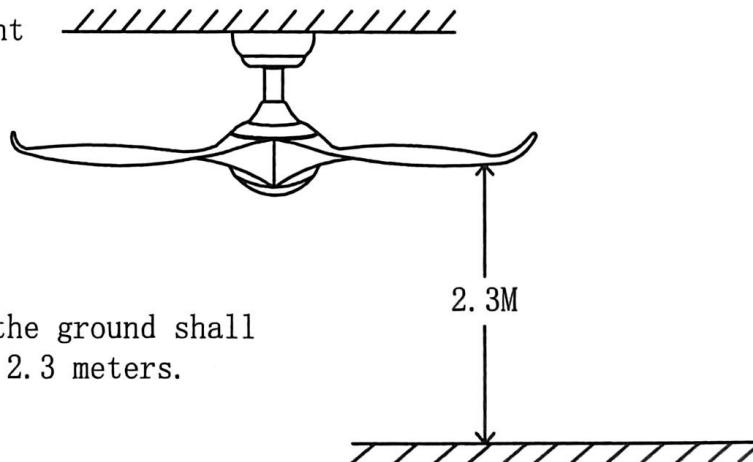


Fan blades to the ground shall note less than 2.3 meters.


9, Hanging ceiling fan

1) Place the lobes in the hanger and turn the pipe so that the groove on the lobes engages the lugs on the dome (inside the hanger)

The lug groove must engage the hanger lug.

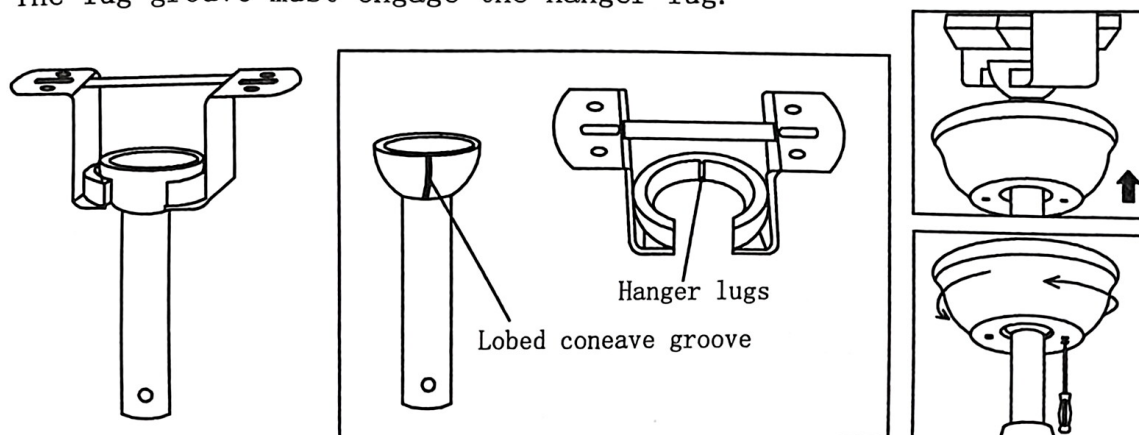

10, Connect the power cord

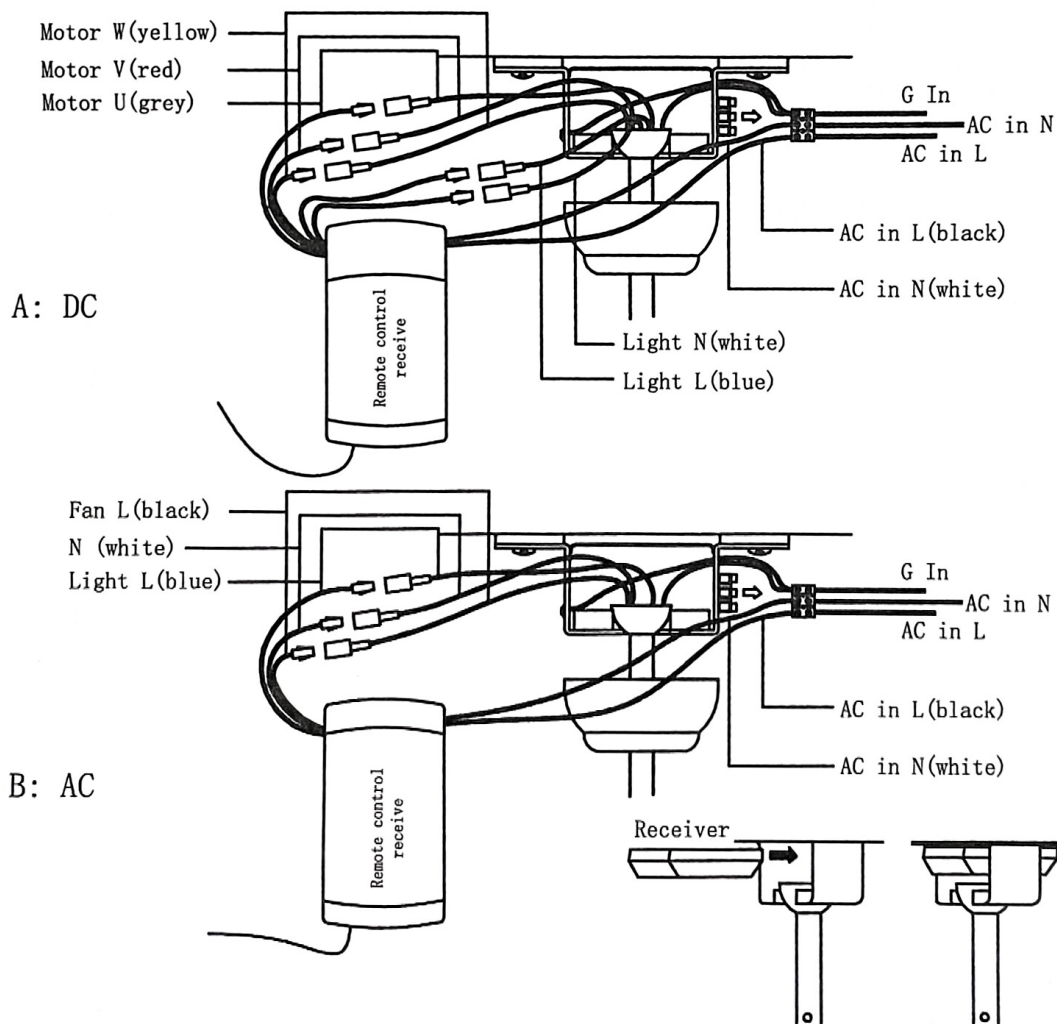

Warm Tips: the Maintenance of Ceiling Fans

- 1) Because the ceiling fan always runs, please check regularly whether the hanger, fan blade, leaf rack and other parts are loose, if not, please fasten it in time to ensure it run with safety.
- 2) Keep ceiling fans clean regularly. Only use a soft brush or a lint-free cloth to clean it gently. Do not use a damp cloth or other destructive cleaner.
- 3) Don't add lubricating oil or lubricant to any part of this product.